



Li/MnO₂ Primary System

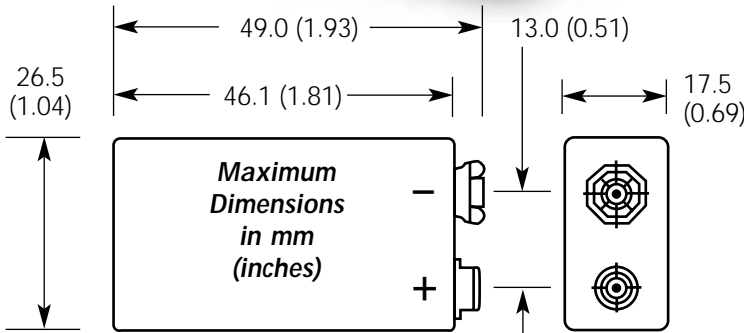

U9VL-J 9V Size Battery

| | |
|----------------------|---|
| System: | Lithium/Manganese Dioxide |
| Designation: | NEDA 1604 LC |
| Nominal Voltage: | 9.0 Volts |
| Capacity (C): | 1,200 mAh @ 900 Ω to 5.4V @23°C |
| Max. Discharge: | 120 mA Continuous |
| Weight: | 36.4 grams |
| Oper. Temp. Range: | -20° to 60°C |
| Storage Temp. Range: | -40° to 60°C |
| Volume: | 22.6 cm ³ |
| Terminals: | Miniature Snap |
| Housing: | Aluminum/Mylar Label |
| Safety: | Less than 2 grams of lithium; no restrictions on transport; MSDS available separately |

 Recognized under the Component Program of Underwriters Laboratories, Inc.

