


ENERGIZER NO. 493



Industry Standard Dimensions in mm (inches)

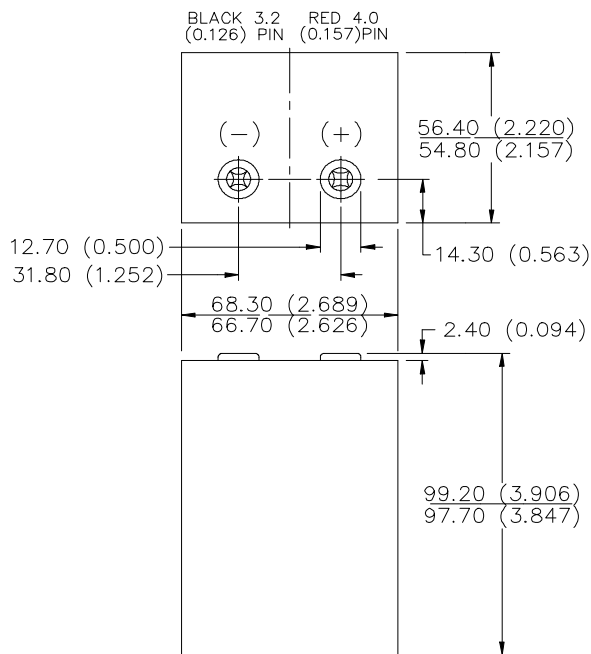


Chemical System: Zinc-Manganese Dioxide (Zn/MnO₂)

Designation: ANSI / NEDA-722
Battery Voltage: 300 Volts
Average Weight: 445 grams (15.8 oz.)
Volume: 360.5 cubic centimeters (22 cubic inch)
Average Capacity: 140 mAh to 0.8 volts/cell
 (Rated at 25 mA continuous drain at 21°C)
Cells: Two Hundred No. 112 in series
Jacket: Paper

TYPICAL DISCHARGE CURVE

Simulated Test @ 21°C (70°F)

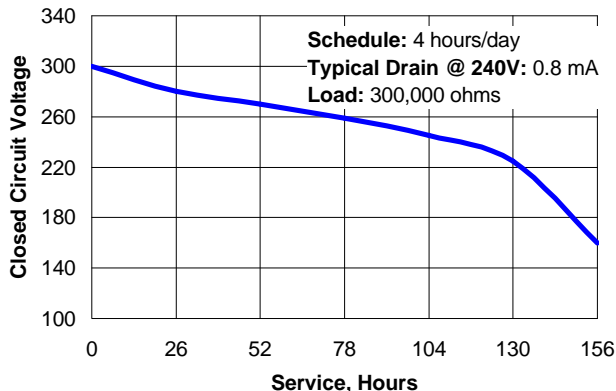

Simulated Application Test Estimated Average Service at 21°C (70°F)

Schedule:	Typical Drains at 240V (milliamperes)	Load (ohms)	Cutoff Voltage					
			160V	180V	200V	220V	240V	260V
4 hours/day	0.8	300,000	156	147	145	135	115	75

Important Notice

This data sheet contains information specific to batteries manufactured at the time of its publication.

Contents herein do not constitute a warranty.

Copyright © Eveready Battery Co. Inc. - All Rights Reserved