


ENERGIZER NO. 711



Industry Standard Dimensions in mm (inches)

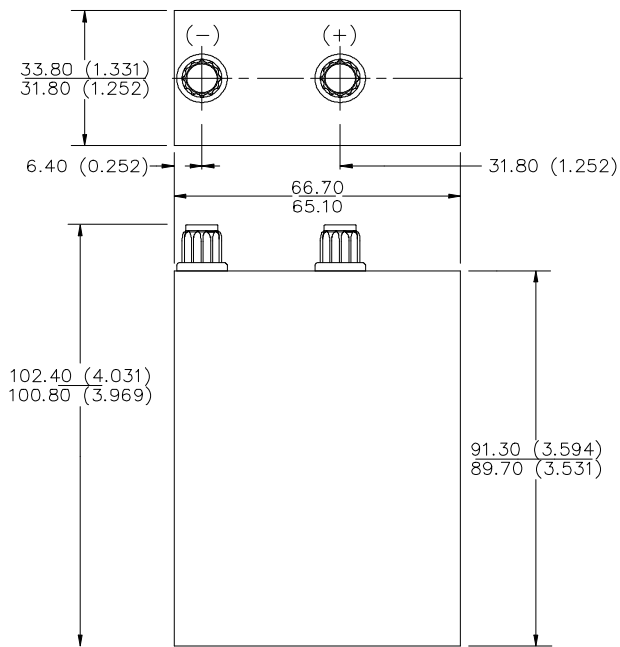

Chemical System: Zinc-Manganese Dioxide (Zn/MnO₂)

Designation: ANSI / NEDA-700, IEC-R25-2

Battery Voltage: 1.5 Volts

Average Weight: 300 grams (10.6 oz.)

Volume: 334 cubic centimeters (12.4 cubic inch)


Average Capacity: 2,200 mAh to 0.8 volts/cell
 (Rated at 25 mA continuous drain at 21°C)

Cells: Two No. 60 (size "F") in parallel

Jacket: Paper

TYPICAL DISCHARGE CURVE

Simulated Test @ 21°C (70°F)

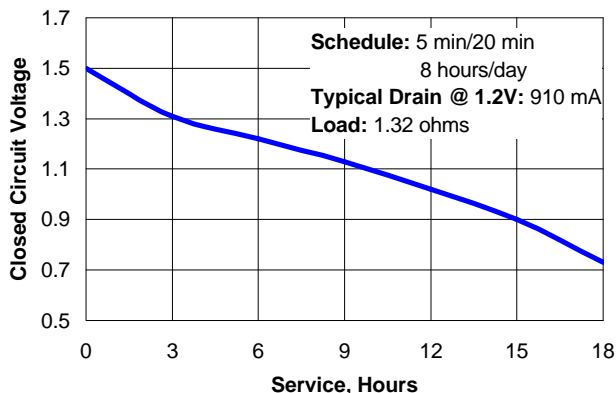

Simulated Application Test Estimated Average Service at 21°C (70°F)

Schedule:	Typical Drains at 1.2V (milliamperes)	Load (ohms)	Cutoff Voltage			
			0.8V	0.9V	1.0V	1.1V
4 hours/day	240	5	Hours 78 61 54			
5 min/20 min 8 hours/day	910	1.32	17	15	13	10

Important Notice

This data sheet contains information specific to batteries manufactured at the time of its publication.

Contents herein do not constitute a warranty.

Copyright © Eveready Battery Co. Inc. - All Rights Reserved