


ENERGIZER NO. 266



Industry Standard Dimensions in mm (inches)

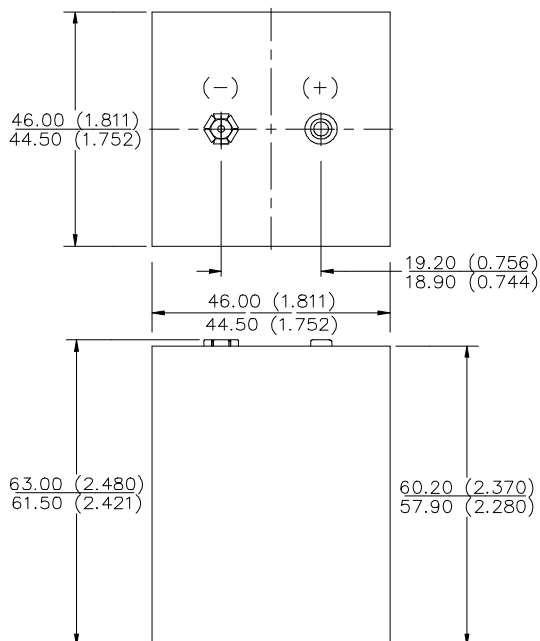

Chemical System: Zinc-Manganese Dioxide (Zn/MnO₂)

Designation: (Previously) ANSI / NEDA-1605

Battery Voltage: 9.0 Volts

Average Weight: 168 grams (5.9 oz.)

Volume: 126 cubic centimeters (7.7 cubic inch)


Average Capacity: 2500 mAh to 0.8 volts/cell
(Rated at 25 mA continuous drain at 21°C)

Cells: Twenty Four No. 117 - Four parallel strings of six in series.

Jacket: Paper

TYPICAL DISCHARGE CURVE

Simulated Test @ 21°C (70°F)

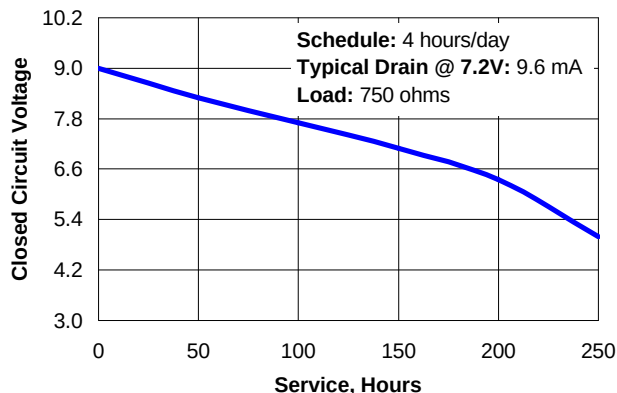

Simulated Application Test Estimated Average Service at 21°C (70°F)

Schedule:	Typical Drains at 7.2V (milliamperes)	Load (ohms)	Cutoff Voltage					
			4.2V	4.8V	5.4V	6.0V	6.6V	7.2V
4 hours/day	9.6	750	Hours					
			243	240	228	195	150	

Important Notice

This data sheet contains information specific to batteries manufactured at the time of its publication.

Contents herein do not constitute a warranty.

Copyright © Eveready Battery Co. Inc. - All Rights Reserved