

# 12V-12V HEAVY DUTY PORTABLE CHARGER

## Dual Independent 20 Amp Outputs!!



**Deltran**

**PERFECT FOR AGM & FLOODED CELLS!!**

**The best way to eliminate sulfation is to prevent it!**


Battery Tender® 12V-12V Heavy Duty chargers will fully charge a battery and maintain it at the proper storage voltage without the damaging effects caused by trickle chargers (especially sulfation).

- ◆ **BTP MICROPROCESSOR TECHNOLOGY**
- ◆ **5-STEP CHARGING (Initialization, Bulk, Absorption, Equalization, & Float)**
- ◆ **USER SELECTABLE BATTERY TYPE (AGM or Flooded)**
- ◆ **SPARK PROOF**
- ◆ **SHORT CIRCUIT PROTECTED**
- ◆ **REVERSE POLARITY PROTECTED**
- ◆ **2 YEAR WARRANTY (Material & Workmanship Only)**

### ORDERING INFORMATION

Deltran PART NO.	DESCRIPTION
021-1158-12	DVD-40: 12V-12V Dual 20 Amp
Charger Case Dimensions: 11.5 in (292mm) L x 8.625 in (219 mm) W x 6.625 in (168 mm) H. <b>Shipping Weight: Approx 28 lbs (12.75 kg)</b>	
<b>MSRP \$359.95 U.S.D.</b>	

TECHNICAL SPECIFICATIONS SUMMARY	
Input Voltage & Frequency	100 TO 132 VAC, 60 Hz
Output Current	<b>Full 20 Amps Each Channel</b>
Output Voltage	<b>Dual 12 Volts: Independent</b>
Charger Output Voltage Amplitudes throughout the entire charge algorithm, including absorption and float maintenance, are consistent with the optimum charging recommendations of the major lead-acid battery manufacturers.	
Maximum Operating Temperature	50 °C Typical

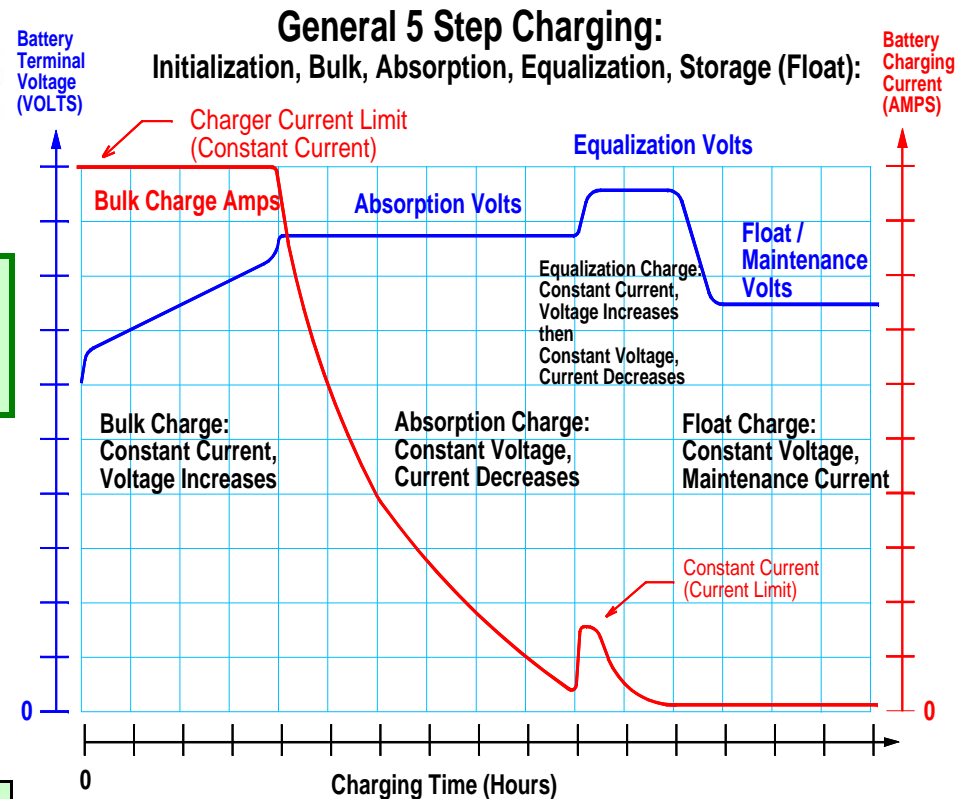

**Deltran** CORPORATION

801 International Speedway Blvd.

DeLand, Florida 32724

Phone: 386-736-7900 FAX 386-736-0379

www.batterytender.com