

PC 2150 GROUP 31 PRELIMINARY SPECIFICATIONS

Battery Design

- 12V battery pure lead VRLA
- SAE Group 31 footprint
- Rugged military construction
- 3/8 in. (9.5 mm) corrosion-free stud terminal
- Can be mounted in any orientation
- Suitcase lifting handle
- UPS/FedEx shippable with no restrictions
- Shipped fully charged – just install and go!

Performance Features







- CCA: 1,090A at 0°F (-18°C)
- HCA: 1,545A at 80°F (27°C)
- MCA: 1,370A at 32°F (0°C)
- Reserve capacity: 185 minutes
- Short circuit current: 4,300A
- Deep cycling capability: 400 at 100% DOD
- Design life: 12 years
- Typical service life: 6 to 8 years

Physical Characteristics

Nominal Dimensions, in. (mm)							Weight
A	B	C	D	E	F		
13.00 (330.2)	6.80 (172.7)	9.40 (238.8)	10.075 (255.9)	0.364 (9.2)	0.882 (22.4)	89 lb (40.5 kg)	

Dimensions



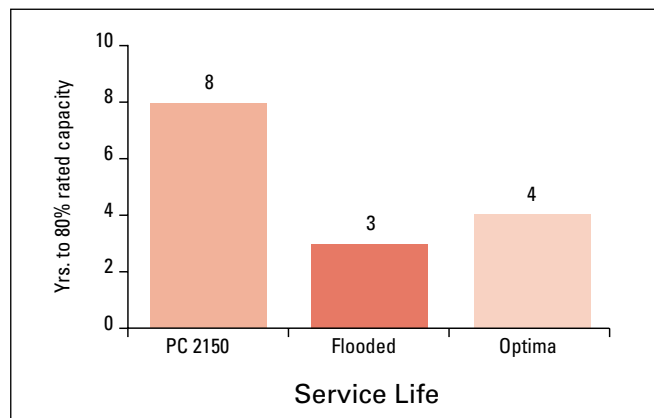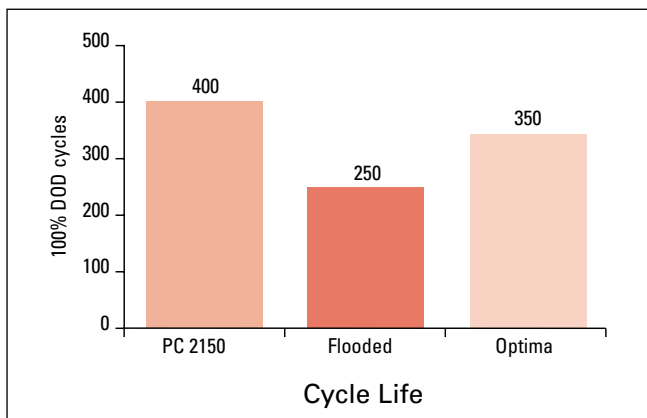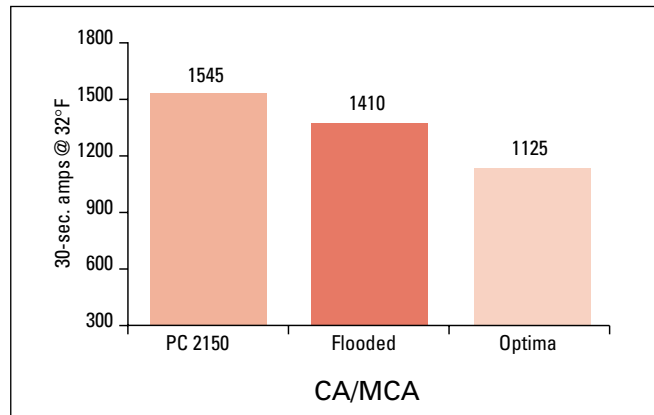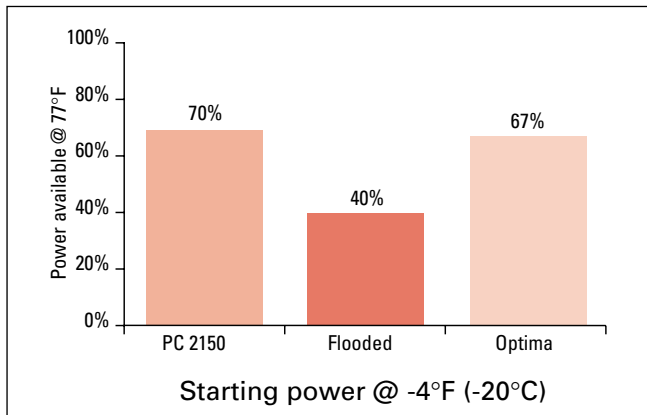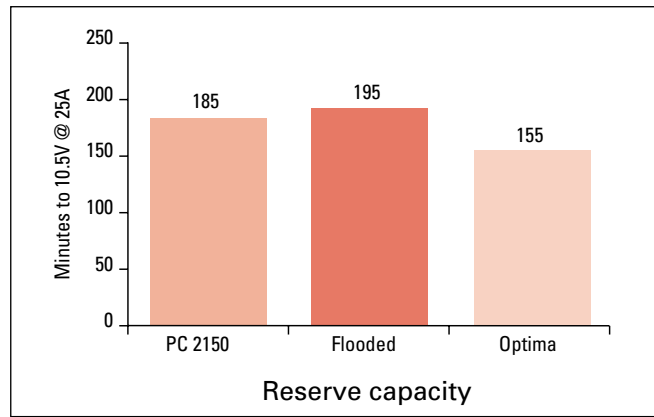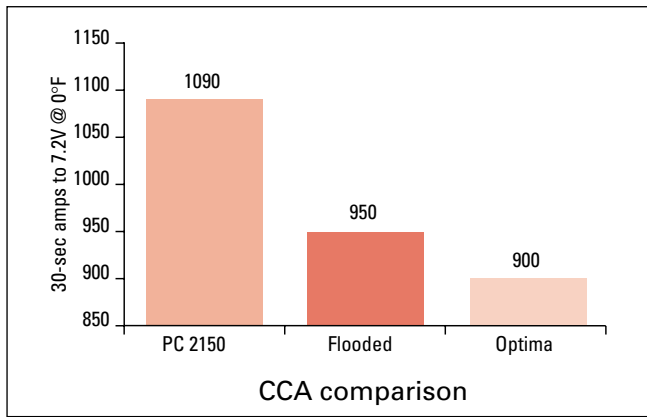

High Rate Discharge at 77°F (25°C)

5 sec.	10 sec.	15 sec.	20 Sec.
2,150A	1,985A	1,800A	1,695A

Extended Discharge at 77°F (25°C) to 10.02V

5 min	15 min	1 hr	3 hr	5 hr	10hr	20hr
1704A	294.9A	64.2A	24.9A	16.0A	8.8A	4.8A



www.enersysinc.com

Global Headquarters
 P.O. Box 14145 Reading,
 PA 19612-4145
 USA
 Tel: +1-610-208-1991
 +1-800-538-3627
 Fax: +1-610-372-8613

Hawker Energy
 Products Inc.
 Warrensburg,
 MO 64093
 USA
 Tel: +1-660-429-2165
 Fax: +1-660-429-1758

EnerSys EMEA
 Brussels, Belgium
 Tel: +32 (0)2 247 94 47

EnerSys Asia
 Guangdong, China
 Tel: +86-755-2689 3639

Distributed by:

Printed in USA